


8.5 X 8.0 T-EXTREME INSERTS

FITS 84/90 U-FRAME

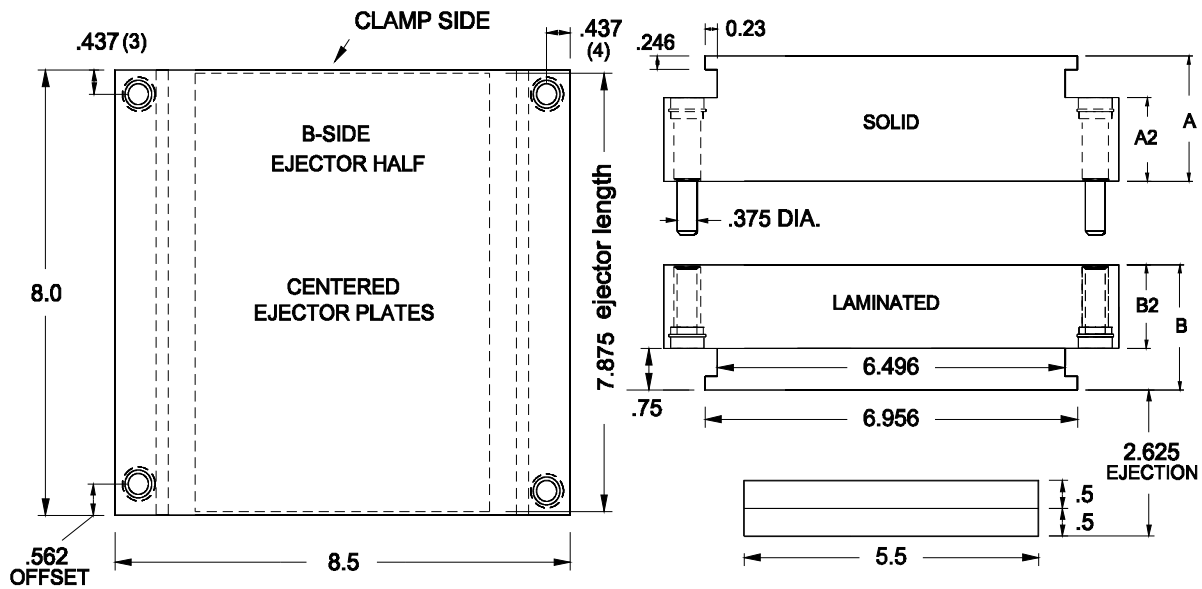

T-Extreme Solid Insert (8.0 X 8.5)				
Catalog #	A	A2	B2	B
84/90 TXS 541	1.750	1.000	1.000	1.750
84/90 TXS 542	1.750	1.000	1.500	2.250
84/90 TXS 543	2.250	1.500	1.000	1.750
84/90 TXS 544	2.250	1.500	1.500	2.250
84/90 TXS 545	2.250	1.500	2.000	2.750
84/90 TXS 546	2.750	2.000	1.500	2.250
84/90 TXS 547	2.750	2.000	2.000	2.750

T-Extreme Laminated Insert (8.0 X 8.5)				
Catalog #	A	A2	B2	B
84/90 TXL 501	1.750	1.000	1.000	1.750
84/90 TXL 502	1.750	1.000	1.500	2.250
84/90 TXL 503	2.250	1.500	1.000	1.750
84/90 TXL 504	2.250	1.500	1.500	2.250
84/90 TXL 505	2.250	1.500	2.000	2.750
84/90 TXL 506	2.750	2.000	1.500	2.250
84/90 TXL 507	2.750	2.000	2.000	2.750

- Also available mix & match thickness' and half solid/half laminate combinations.
- Available in 4140, P-20, PX5, 420SS Prehard, and ALUMOLD®¹ (comparable to QC-7®²)

Ear plates in 4140 Prehard

Laminates only: 1/4" dowels are centered on the 8.5" width and located .250" in from each end on TXL's 8" length

The 84/90 TXL is available with 08/09 Ear Plates

¹ALUMOLD® is a registered trademark of Alcan/Pechiney.
²QC-7® is a registered trademark of ALCOA.

"A" & "B" dimensions are supplied .004" to .007" oversized at parting line unless otherwise specified.